


Assembly High Tack



Assembly High Tack 22137

Assembly High Tack is an extremely fast-setting, high quality aliphatic resin emulsion adhesive. It dries very rapidly to give a short clamp time and has high solvent resistance. Assembly High Tack is excellent for general assembly as well as edge and face gluing of hardwoods and softwoods.

Spread rate is approximately 35-50 pounds of adhesive per 1,000 square feet of glue line for edge and face gluing. Generally accepted assembly times range from approximately two to 10 minutes.

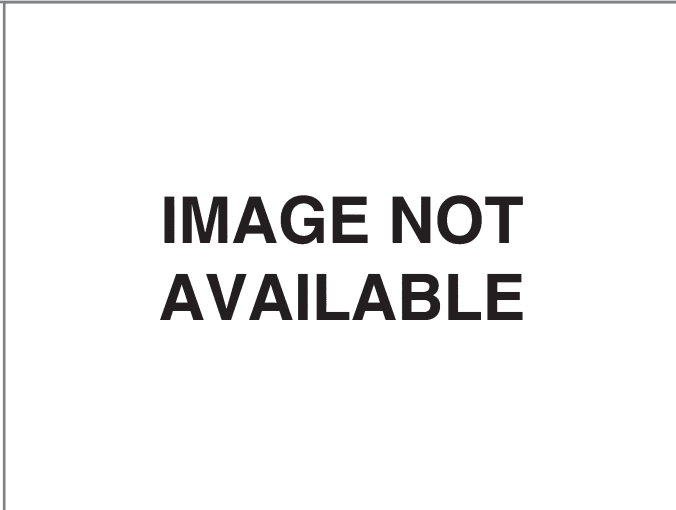

Product No.	Description	Unit
22137	Assembly High Tack - 5 Gallon	each

Titebond White Glue



Titebond White Glue 5026

This exceptionally strong, economical white glue sets faster than most other comparable glues. Its versatile formula is ideal for general woodworking applications, as well as many other porous and semi-porous materials. It offers a strong initial tack and sets fast to reduce clamp time. This product provides a translucent glue line, offers excellent sandability and is unaffected by finishes. Titebond White Glue is easy to use, nontoxic and cleans up with water.



Product No.	Description	Unit
5026	Titebond White Glue - Gallon	each

Titebond II Premium Wood Glue



Titebond II Premium Weatherproof Wood Glue 5006 5007

The first leading brand, one-part wood glue that passes the ANSI Type II water-resistance specification. It offers excellent heat-resistance, strong initial tack, fast speed of set and forms a bond stronger than the wood itself. It resists solvents, heat and water and sands easily without softening. It is paintable, solvent free and nontoxic. Ideal for exterior woodworking projects, including outdoor furniture, birdhouses, mailboxes, planters and picnic tables. FDA approved for indirect food contact (cutting boards, laminate trim).



Product No.	Description	Unit
5006	Titebond II Premium Wood Glue - Gallon	each
5007	Titebond II Premium Wood Glue - 5 Gallon	each

Titebond Original Wood Glue

Titebond Original Wood Glue 5066 5067

The industry standard for woodworking, this original aliphatic resin glue has been used by craftsmen and furniture manufacturers for over 50 years. It provides a strong initial tack and fast speed of set to reduce clamp time. It develops a bond stronger than the wood itself, offers excellent sandability and is unaffected by finishes. Ideal for wood, hardboard, particleboard, leather, cloth and most other porous materials. It is easy to use, nontoxic and cleans up with water. Conforms to the requirements of ASTM D4236.

Product No.	Description	Unit
5066	Titebond Original Wood Glue - Gallon	each
5067	Titebond Original Wood Glue - 5 Gallon	each

Franklin International



Titebond Extend Wood Glue

Titebond Extend Wood Glue 9106

A slower setting version of Titebond Original Wood Glue, it offers superior performance in a broad range of applications, including edge and face gluing. It is particularly useful in complex operations such as curved railings and other assemblies that require more time to align. Develops a bond stronger than wood itself, offers excellent sandability and is unaffected by finishes. It is compatible with all common species of wood, as well as particleboard, MDF, plywood and other porous materials.

Product No.	Description	Unit
9106	Titebond Extend Wood Glue - Gallon	each

Franklin International



GlüBot

FastCap

GlüBot GBGLUBOT

The Glü-Bot from FastCap is the only glue bottle that will not drip or spill. You never have to clean up glue spills or drips again. The easy-squeeze Glü-Bot will put the glue where you want it... and only where you want it.

- Available with 16 ounce glue capacity (glue not included)
- Sill-proof nozzle
- Essential for every craftsman
- Vacuum valve keeps glue level high... even when you're getting low
- One Blade and one Yorker tip included

Product No.	Description	Unit
GBGLUBOT	Glu-Bot 16 oz. Glue Bottle	each

