

Router Bits




Steel Ball Bearing Guides 47702 47706

Amana Tool uses only the finest industrial quality precision ball bearings available. Bearings are double steel-shielded for extra rigidity and to inhibit dust. A special high-performance, high-temperature grease is used for maximum life.

47702 fits 3/8" diameter flush trim bits, all beading bits, 49300/49302, 49340, 49350, 49540, 49542, 49550 and many types of form bits.

47706 is our most popular bearing. It fits 1/2" diameter flush trim bits, some bevel trim, all corner rounds, raised panel, rabbet, ovolo, many types of form bits, 51570, 54160, 54162, 54198, 54370 and new style 54200 and 54220 (after 12/1995).

NOTE: Solvents should not be used to clean ball bearings, as this will deteriorate the special grease. "Frozen" bearings (ones that do not rotate freely) should be replaced immediately.



Product No.	Description	Bit Dimensions (in inches)		
		D	d	B
47702	Steel Ball Bearing Guide	3/16	3/8	1/8
47706	Steel Ball Bearing Guide	3/16	1/2	3/16

Combination Ripping & Cross-Cut Saw Blade




Combination Ripping & Cross-Cut Saw Blade 610504

15° Hook


Combination Grind

4 ATB (Alternate Top Bevel) and 1 Raker

Application: Designed for ripping and cross-cutting natural woods. Teeth consist of four ATB followed by one square raker. Large gullets in the saw body allow for deeper cuts and improved chip ejection despite short pitch.



Combination Rip/Crosscut

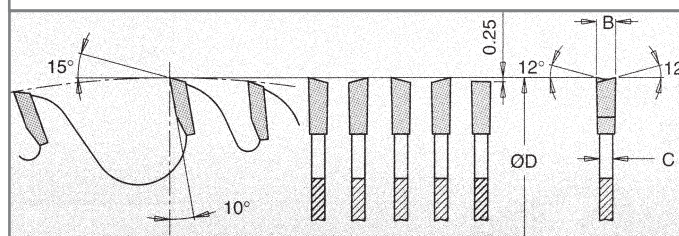

Product No.	"D" Dia.		Teeth	Grind	"B" Kerf		"C" Plate		Bore
	Inch	mm			Inch	mm	Inch	mm	
610504	10	250	50	4 & 1	.135	3.4	.095	2.4	5/8