

Router Bits



Straight Plunge Cutting Bits 45210 45218

1/4" Shank, 2 Flute

Straight Plunge Cutting Bits 45426

1/2" Shank, 2 Flute

A single flute allows for faster feed rates, greater chip clearance and maximum stock removal.

Flush Trim Plunge Bits 45460

2 Flute

Very useful for template and pattern routing where the template is on top of the workpiece. Ball bearing guide rides against the template for an exact duplication. If used on a router table, the pattern will be on the bottom, below the workpiece.

Flush Trim Bits with Ball Bearing Guide 47100 to 47108

2 Flute

Bearings not guaranteed due to size.

Extra Long Flush Trim Bits with Ball Bearing Guide 47126


2 Flute

Bearings not guaranteed due to size.

Dynabit™ Laminate Trim Bits 47105 47109

2 Flute with Ball Bearing Guide

New downshear helix laminate trim bits for an excellent finish, especially in difficult materials such as melamine. Not recommended for use in a router table.

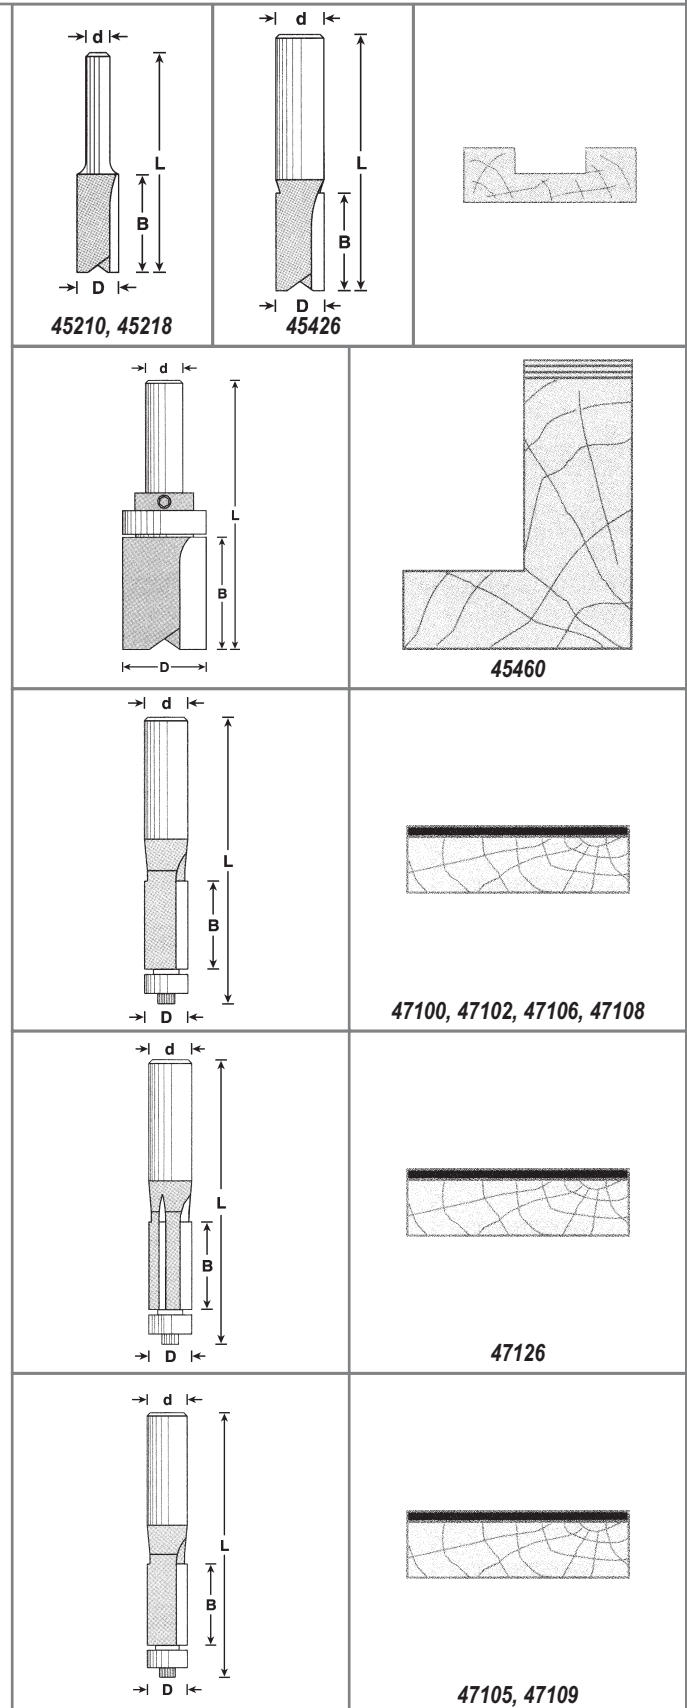

| Product No. | Description | Bit Dimensions (in inches) | | | | | |
|-------------|------------------------------|----------------------------|-----|-----|---|-----|-------|
| | | a° | D | B | R | d | L |
| 45210 | Bit, 1/4" Shank 2 Flute | | 1/4 | 1 | | 1/4 | 2 |
| 45218 | Bit, 1/4" Shank 2 Flute | | 3/8 | 1 | | 1/4 | 2-1/4 |
| 45426 | Bit, 1/2" Shank 2 Flute | | 1/2 | 2 | | 1/2 | 4-1/4 |
| 45460 | Bit, 2 Flute FT Plunge | | 1/2 | 1 | | 1/4 | 2-1/2 |
| 47100 | Bit, 2 Flute Flush Trim | | 3/8 | 1 | | 1/4 | 2-5/8 |
| 47102 | Bit, 2 Flute Flush Trim | | 3/8 | 1/2 | | 1/4 | 2-1/8 |
| 47106 | Bit, 2 Flute Flush Trim | | 1/2 | 1/2 | | 1/4 | 2-1/4 |
| 47108 | Bit, 2 Flute Flush Trim | | 1/2 | 1 | | 1/2 | 3-1/4 |
| 47126 | Bit, 2 Flute EL Flush Trim | | 1/2 | 2 | | 1/2 | 4-1/4 |
| 47105 | Bit, 2 Flute Ball Brg. Guide | | 1/2 | 1 | | 1/4 | 2-5/8 |
| 47109 | Bit, 2 Flute Ball Brg. Guide | | 1/2 | 1 | | 1/2 | 3 |